



**Kennon®**  
Top-/Under-Mount Kitchen Sink  
**K-8185-1**

### Features

- 36-inch minimum base cabinet width for under-mount or top-mount installation.
- Double equal bowls.
- 9-inch depth.
- Includes 1 faucet hole on rear deck (3 more faucet holes available for knockout with ball-peen hammer & punch).
- Includes cutout templates.
- Includes K-5662 bottom sink rack
- Optional K-5186 bottom basic rack(sold separately)

### Material

- KOHLER Neoroc® composite is durable and built to withstand day-to-day cleaning tasks.
- Matte finish offers rich, dimensional color.
- Solid color throughout the sink.
- Heat resistant up to 750 degrees F.
- Scratch, stain, chip, and thermal-shock resistant.

### Installation

- Top-mount or under-mount.

### Recommended Products/Accessories

K-9000 P-Trap  
K-8801 Sink Strainer  
K-8799 Sink Strainer

### Optional Products/Accessories

K-5186 Right-Bowl Sink Rack

### Included Components

Additional Components:  
K-5662



### Codes/Standards




CSA B45.5/IAPMO Z124


### KOHLER® Neoroc® Sinks Lifetime Limited Warranty

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	CM7	Graphite
	CM1	Neoroc® Matte Black
	CM2	Neoroc® Matte Brown

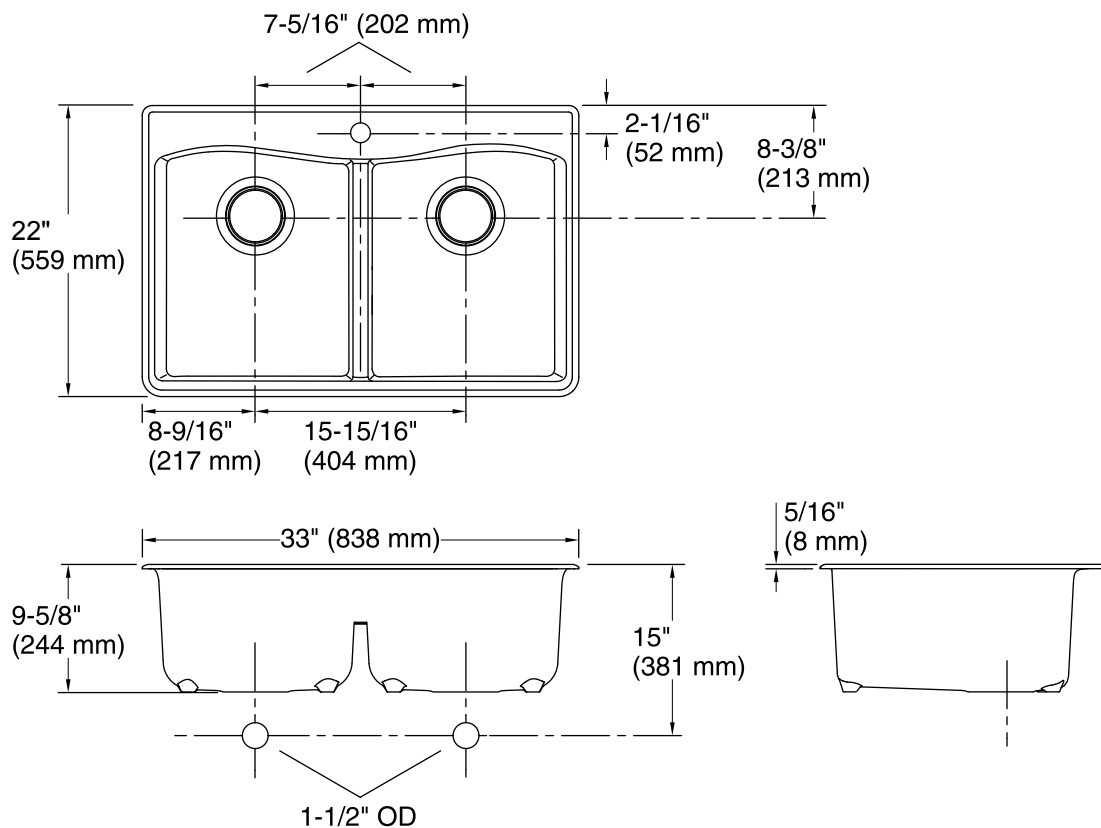

## Technical Information

All product dimensions are nominal.

Installation: Under-mount, Top-mount

Min. base cabinet width: 36" (914 mm)

Bowl area (Left): Length: 14-9/16" (370 mm)  
Width: 16-13/16" (427 mm)  
Bowl depth: 9" (229 mm)  
Water depth: 9" (229 mm)

Bowl area: Length: 14-9/16" (370 mm)  
Width: 16-13/16" (427 mm)  
Bowl depth: 9" (229 mm)  
Water depth: 9" (229 mm)

Faucet hole spacing: 4" (102 mm)

Drain hole: 3-7/8" (98 mm)

Template: 1281758-7, required, included

## Notes

Install this product according to the installation instructions.