


Technical drawing of a vertical rod. The drawing shows a rod with a diameter of 90. The total height is 40. The rod is secured by a nut and washer at the top, with a dimension of 53 from the top of the rod to the center of the nut. The rod is also secured by a nut and washer at the bottom, with a dimension of 55 from the bottom of the rod to the center of the nut.

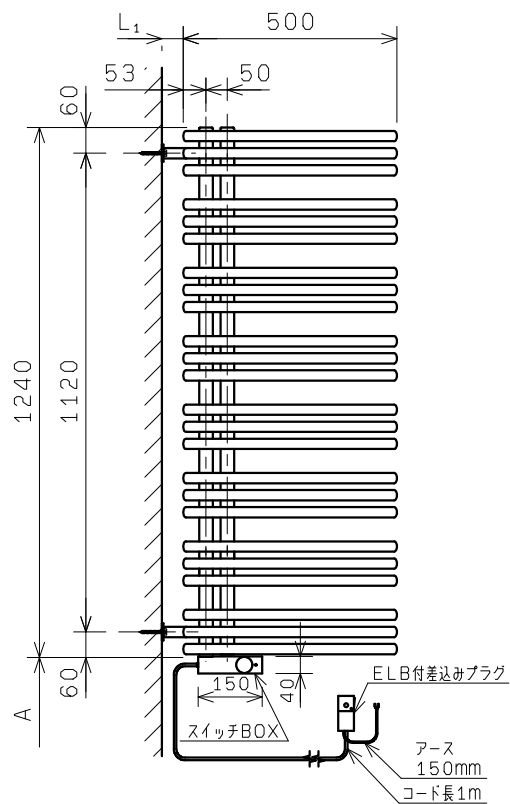

重量 : 18.9kg
 定格電圧 : AC 100V
 定格消費電力 : 600W
 漏電保護器 : 100V, AC, 15A, 15mA
 (差し込みプラグELB)
 50/60HZ兼用
 アース線 : Y端子接続 長さ150mm
 温度ヒューズ : 91℃
 温度調整範囲 : 30℃~70℃
 凍結温度 : -13℃
 電源コード長 : 1000mm

Technical drawing of a rectangular plate with the following dimensions and features:

- Overall width: 90
- Overall height: 40
- Left edge offset: 10
- Distance between hole centers: 45
- Distance from right hole center to right edge: 25
- Right edge offset: 10
- Hole diameter: $2 \times \varnothing 16$

ビスA	ビスB
コーチねじ 8×60 	コーススレッド 5.3×40
プラグ 10×50 	

図番						図名	YAE08/L-500L 100V 600W 横壁支持				
製図	小松	担当	馬淵	検図	大久	尺度	/	投影法	三角法	日付	20/06/12
 ピーエス工業株式会社						備考					